

Please read this manual thoroughly to familiarize yourself with the update procedures before updating the firmware.

Model covered

UD-507

Supported operating systems

Windows 10 (32/64-bit)

Windows 11

As of October, 2025

Checking the firmware version

- 1 Turn the unit on.**
- 2 Press the MENU button to open the menu screen.**
- 3 Turn the INPUT knob to show the information display (VERSION INFO) in the UNIT setting group.**

Display example



The number shown to the right of "SYSTEM" is the firmware version.

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Other company names and product names in this document are the trademarks or registered trademarks of their respective owners.

Update procedures

The maintenance port on the unit is a Type-C port. Use a USB cable that has a Type-C connector and a connector that matches the USB port on the computer being used.

- Cables designed only for charging cannot be used for firmware updates. Always use a USB cable that supports data transmission.

NOTE


The screens used in these instructions are from Windows 11.

1 Uncompress the downloaded file.

The following files will appear.

- Win_DFU_driver.exe
- UD-507_updater_xxxx.exe (xxxx is the firmware version)


2 Double-click Win_DFU_driver.exe, and press the Enter key.

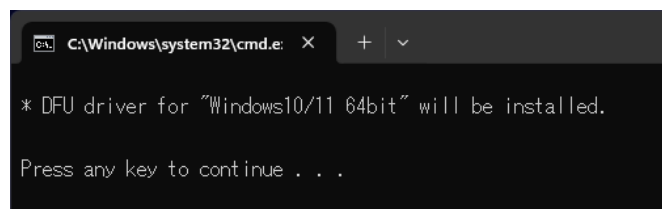

NOTE


If a "User Account Control" pop-up message appears during installation, click "Yes".

3 When the Device Driver Installation Wizard appears, click "Next".

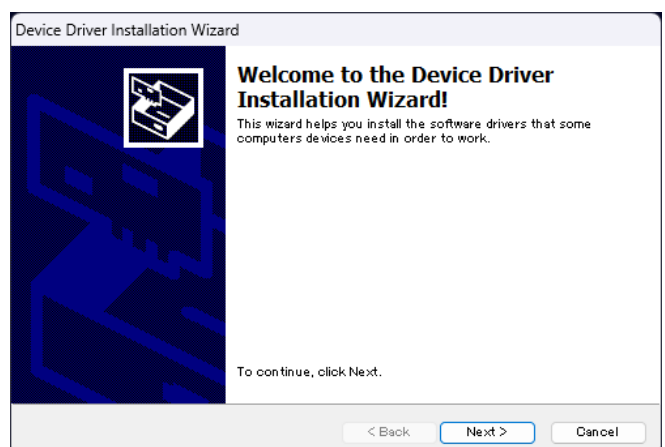


Continued on the next page ➡


4 Click "Finish".

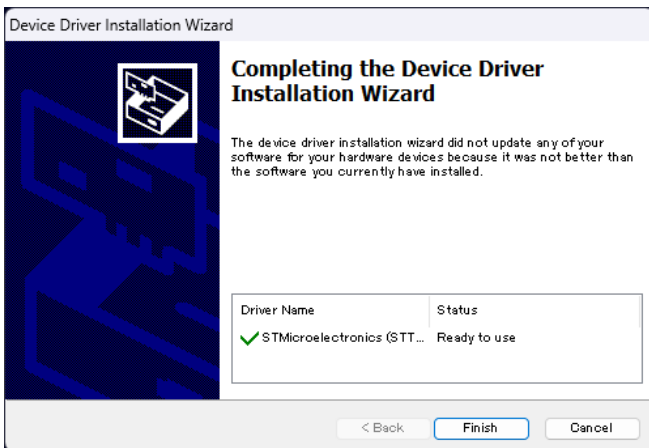

5 While pressing and holding the unit's INPUT knob, set the STANDBY/ON switch to ON.

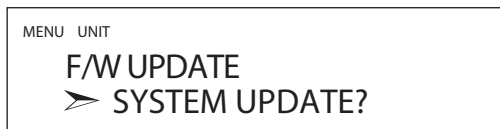


6 When "F/W UPDATE" appears, turn the INPUT knob to show SYSTEM UPDATE. Then, press the INPUT knob.

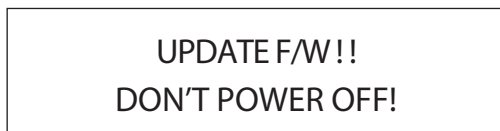



If the screen shown above does not appear, set the unit's STANDBY/ON switch to STANDBY, and repeat step 5.

7 Connect the USB port (Type-C) on the front of the unit to the computer using a USB cable.

Refer to the unit's operation manual for the location of the USB port.

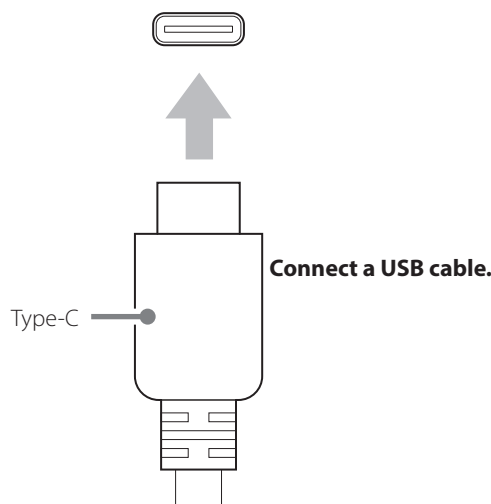


8 Double-click UD-507_updater_XXXX.exe, and click OK.

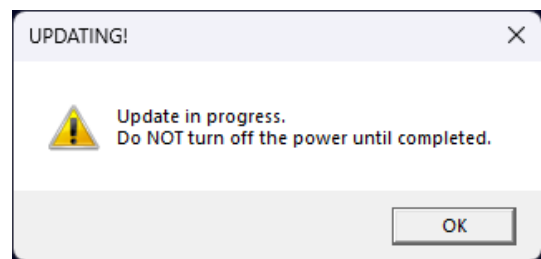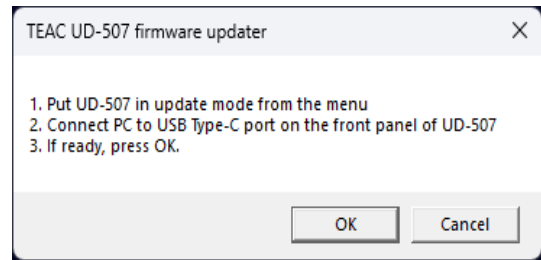

NOTE


The following screen will appear if the unit is not recognized by the computer. Click OK to close the window.

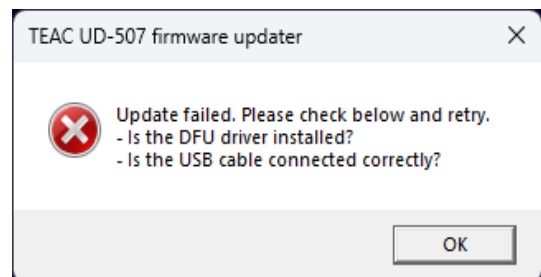

Check the connection between the computer and the unit, and double-click UD-507_updater_XXXX.exe.

- Cables designed only for charging cannot be used for firmware updates. Use a USB cable that supports data transmission.
- Connecting to a different USB port on the computer might allow it to recognize the unit.

9 When "Update is completed!" appears, click OK to close the window.



10 Set the unit's STANDBY/ON switch to STANDBY.

Follow the procedures in "Checking the firmware version" on the previous page and check the firmware version.